

Sunmodule[®]

SW 150 mono R6A



Data sheet



Quality made by SolarWorld



TUV Power controlled:
Lowest measuring tolerance in industry



25 year performance warranty and
5 year product warranty

SolarWorld quality standards go far beyond the norm. SolarWorld applies these high standards for product quality at all its production sites. SolarWorld specifications, quality guidelines and tests, and defined quality materials are the same throughout the world.

The TÜV Rheinland Power controlled inspection mark guarantees that the nominal power indicated for solar modules is inspected at regular intervals and thus ensured. The deviation to TÜV is maximum 2 percent.

Resistant to extreme weather conditions: SolarWorld modules, tested and certified, are resistant against sandstorms, high winds or saline environments.

Sunmodule[®] SW 150 mono R6A



PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)*

		SW 150
Maximum power	P_{max}	150 Wp
Open circuit voltage	U_{oc}	22.8 V
Maximum power point voltage	U_{mpp}	18.4 V
Short circuit current	I_{sc}	8.85 A
Maximum power point current	I_{mpp}	8.37 A


Measuring tolerance (P_{max}) traceable to TUV Rheinland: +/- 2% (TUV Power controlled)

*STC: 1000W/m², 25°C, AM 1.5

PERFORMANCE AT 800 W/m², NOCT, AM 1.5

		SW 150
Maximum power	P_{max}	114.4 Wp
Open circuit voltage	U_{oc}	21.0 V
Maximum power point voltage	U_{mpp}	16.9 V
Short circuit current	I_{sc}	7.22 A
Maximum power point current	I_{mpp}	6.76 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m², 97% (+/-3%) of the STC efficiency (1000 W/m²) is achieved.

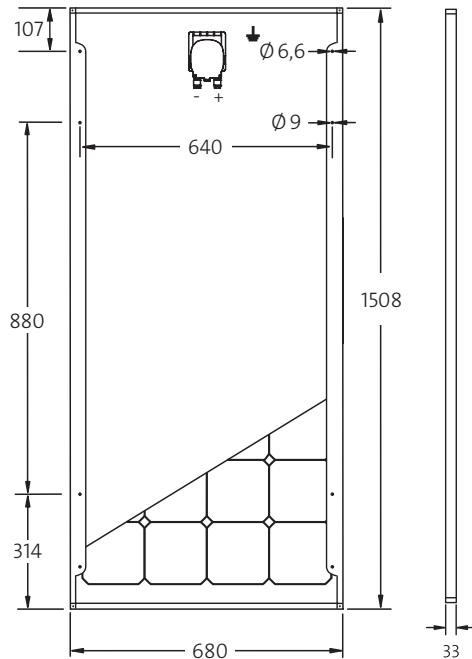

COMPONENT MATERIALS

Cells per module	36
Cell type	Mono crystalline
Cell dimensions	156 mm x 156 mm
Front	Tempered safety glass (EN 12150)
Back	Film, white
Frame	Clear anodized aluminum
J-Box	IP65

DIMENSIONS / WEIGHT

Length	1508 mm
Width	680 mm
Height	33 mm
Weight	11.8 kg

THERMAL CHARACTERISTICS

NOCT	46 °C
TK I_{sc}	0.044 %/K
TK U_{oc}	-0.31 %/K
TK P_{mpp}	-0.43 %/K

PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

Power sorting	-5 % / +10 %
Maximum system voltage SC II	1000 V
Maximum reverse current	15 A
Load / dynamic load	5.4 / 2.4 kN/m ²
Number of bypass diodes	2
Operating range	-40 °C to +85 °C



ORDERING INFORMATION

Order number	Description
82000150	Sunmodule SW 150 mono R6A