

Sunmodule[®] SW 100 poly RGP



Data sheet



Quality made by SolarWorld



www.tuv.com
ID 0000039351

TUV Power controlled:
Lowest measuring tolerance in industry



25 year performance warranty and
5 year product warranty



SolarWorld quality standards go far beyond the norm. SolarWorld applies these high standards for product quality at all its production sites. SolarWorld specifications, quality guidelines and tests, and defined quality materials are the same throughout the world.

The TUV Rheinland Power controlled inspection mark guarantees that the nominal power indicated for solar modules is inspected at regular intervals and thus ensured. The deviation to TUV is maximum 2 percent.

Resistant to extreme weather conditions: SolarWorld modules, tested and certified, are resistant against sandstorms, high winds or saline environments.

Sunmodule[®] SW 100 poly RGP



PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)*

		SW 100
Maximum power	P_{max}	100 Wp
Open circuit voltage	U_{oc}	44.2 V
Maximum power point voltage	U_{mpp}	37.6 V
Short circuit current	I_{sc}	3.02 A
Maximum power point current	I_{mpp}	2.75 A


Measuring tolerance (P_{max}) traceable to TUV Rheinland: +/- 2% (TUV Power controlled)

*STC: 1000W/m², 25°C, AM 1.5

PERFORMANCE AT 800 W/m², NOCT, AM 1.5

		SW 100
Maximum power	P_{max}	72.7 Wp
Open circuit voltage	U_{oc}	38.9 V
Maximum power point voltage	U_{mpp}	33.1 V
Short circuit current	I_{sc}	2.46 A
Maximum power point current	I_{mpp}	2.20 A

Minor reduction in efficiency under partial load conditions at 25°C: at 200 W/m², 100% (+/-2%) of the STC efficiency (1000 W/m²) is achieved.

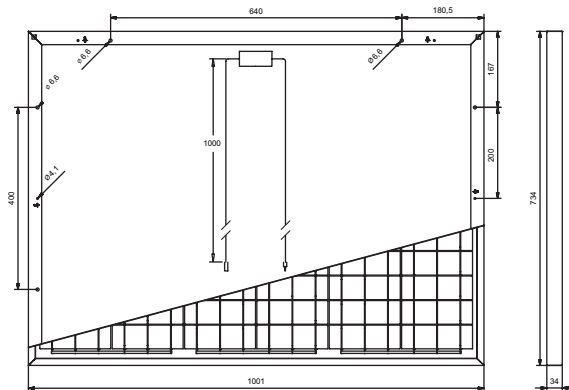

COMPONENT MATERIALS

Cells per module	72
Cell type	Poly crystalline
Cell dimensions	52 mm x 156 mm
Front	Tempered safety glass (EN 12150)
Back	Film, white
Frame	Clear anodized aluminum
J-Box	IP65

DIMENSIONS / WEIGHT

Length	734 mm
Width	1001 mm
Height	34 mm
Weight	8.0 kg

THERMAL CHARACTERISTICS

NOCT	46 °C
TK I_{sc}	0.051 %/K
TK U_{oc}	-0.31 %/K
TK P_{mpp}	-0.41 %/K

PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

Power sorting	-5 % / +5 %
Maximum system voltage SC II	1000 V
Maximum reverse current	15 A
Load / dynamic load	5.4 / 2.4 kN/m ²
Number of bypass diodes	3
Operating range	-40°C bis + 85°C



www.tuv.com
ID 0000039351



ORDERING INFORMATION

Order number	Description
82000146	Sunmodule SW 100 poly RGP